

DATA SHEET

AUTOMATIC DOUBLE SMOKELESS FRYER TURBOFRY9+9 III380

Machine designed to deliver high-quality frying without the need for smoke extraction or additional installations. Its advanced air filtration and recirculation technology makes it ideal for restaurants, fast-food outlets, catering services, shopping centers, supermarkets, service stations, and other hospitality establishments. Thanks to its innovative **Ciclonic® System**, the fryer minimizes smoke and odors, ensuring an efficient and safe cooking process.



FDSH

TECHNICAL FEATURES:

Design and Construction

- Manufactured in satin-finished **AISI 304 stainless steel**, ensuring durability and resistance.
- Removable tilting basket, facilitating loading and unloading of products.
- Motorized tilting tank with automatic tipping system controlled from the panel.
- Thermally insulated to optimize energy consumption.
- Built in compliance with **CE standards**, certified for recirculated air free of grease and smoke.

Filtration and Cleaning System

- Removable active carbon filter with a lifespan of 1 year or 1000 cycles.
- Internal removable oil filter, easy to clean and maintain.
- Grease collection tank with tap for quick disposal of filtered residues.
- All fryer components are detachable for cleaning, dishwasher safe.

Performance and Control

- Adjustable temperature from 80°C to 200°C, adaptable for different products.
- 5 customizable programs for time and temperature, optimizing production.
- Digital display for precise control of the frying process.
- Auto-cooling system activates one hour after operation ends.

Safety and Options

- IP66 water resistance, providing protection against liquids.
- Optional fire protection system, additional cost €2,980.

Cooling System and Energy Efficiency

- Cooling system with R134a gas, CFC-free, with automatic defrost control.
- **Ciclonic® System**, optimizing air filtration and reducing airborne residues.

MODEL: TURBOFRY9+9

DIMENSIONS: Length/Depth 1075 mm / Width 858 mm / Height 728 mm

POWER: 5000W + 5000W


VOLTAGE: 220 or 380 V

OIL CAPACITY: 9+9 L

LOAD kg/CYCLE: 2.2

PRODUCTION kg/H: 50

DIMENSIONES

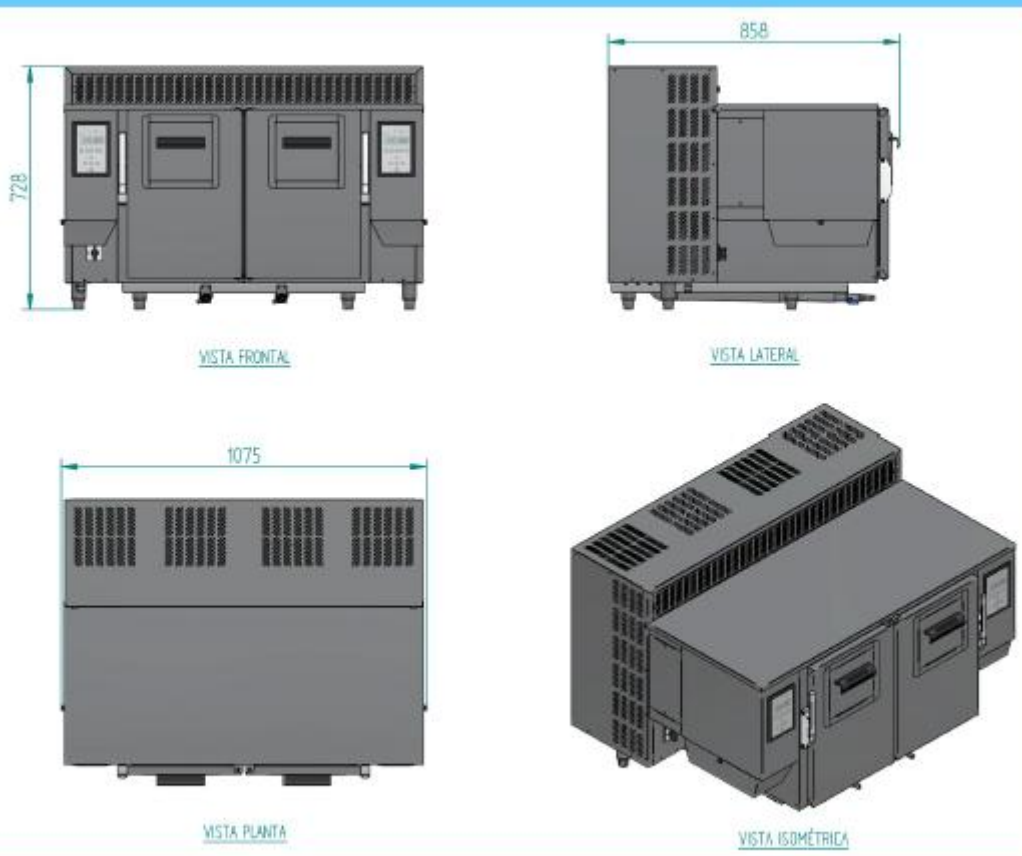

PESO APROX. 95 Kg.
CONEXIÓN ELÉCTRICA: 220 Ò 380V

The company reserves the right to make technical modifications without prior notice.

www.inhospans.com

CONTROL DIGITAL DE DESESCARCHE AUTOMÁTICO.
FILTRO DE CARBONO REMANUFACTURABLE.

V1.0 – 2021/06/18