

DATA SHEET

MOTORISED GAS POT WITH SCRAPER SBG200A-GAS

Round and conical pan designed for food preparation and discharge into carts through a motorized tilting system that maintains a constant discharge height. It features a double bottom containing thermal oil and an inner tank that is easy to clean, equipped with a removable stirrer whose blades scrape the walls to prevent product adhesion and facilitate cleaning. Additionally, it has a double-walled structure with full thermal insulation, contributing to significant energy savings.



TECHNICAL SPECIFICATIONS:

- Manufactured in satin-finished AISI 304 stainless steel.
- Double-walled stainless steel kettle.
- Heating by stainless steel armored electric resistances, immersed in thermal oil.
- Three working modes: continuous rotation in the same direction, rotation with pause, reverse rotation, and automatic tank positioning for discharge.
- Removable stirrer with Teflon scrapers for easy cleaning.
- Complete control panel equipped with emergency stop and electronic board.
- Variable speed drive.
- Built according to CE standards.
- Operating temperature range: 50°C to 180°C.
- Overpressure safety valve.
- Recipe book integrated into PLC with programmable touch screen.
- Option to generate process data reports for sanitary control (Industry 4.0).
- Filling and cleaning tap (optional).
- Drain tap (optional).

MODEL: SBG200A-GAS

DIMENSIONES: LENGHT 1935 mm. / WIDTH 1385 mm. / HEIGHT 1223 mm.

BURNER POWER: 24 KW


MOTOR POWER: 1,1 Kw.

TOTAL POWER: 25,1 Kw.


CAPACITY: 200 L.

VOLTAJE: 380/400V III.


DIMENSIONES

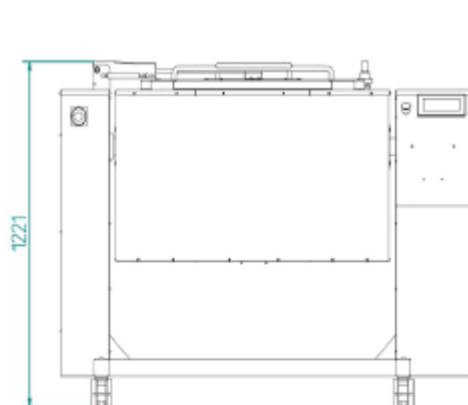


VISTA FRONTAL

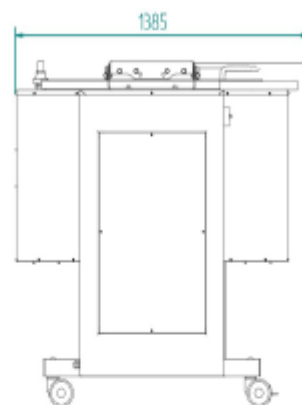

VISTA LATERAL

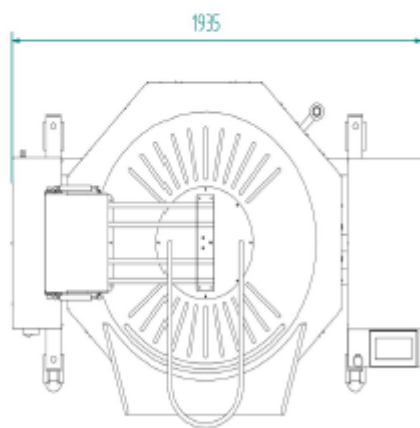

VISTA PLANTA

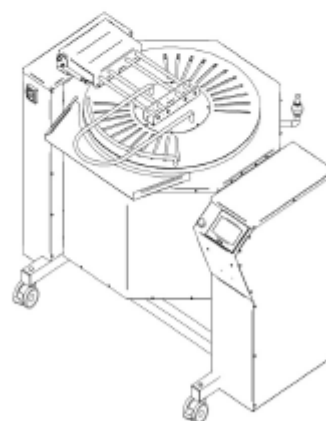

VISTA ISOMÉTRICA

PESO APROX. 328 Kg.
CONEXIÓN ELÉCTRICA: 380/400

The company reserves the right to make technical modifications without prior notice.

www.inhospa.com

V1.0 – 2022/06/06