

DATA SHEET

MOTORISED ELECTRIC BASCULATING SARTEN WITH SCRAPER SBE500A

Round and conical pan designed for food preparation and discharge into carts through a motorized tilting system that keeps the discharge opening height constant. It features a double bottom containing thermal oil and an inner kettle that is easy to clean, equipped with a removable stirrer whose blades scrape the walls to prevent product adhesion and facilitate subsequent cleaning. Additionally, it has double-sided construction with full thermal insulation coating, contributing to significant energy savings.



SB500A

TECHNICAL SPECIFICATIONS:

- Made of satin-finished AISI304 stainless steel.
- Double-walled stainless steel cauldron.
- Heating through stainless steel shielded electric resistances, immersed in thermal oil.
- Three working positions: continuous rotation in the same direction, rotation with pause, reverse rotation, and automatic tank positioning for emptying.
- Removable stirring paddle with Teflon scrapers for easy cleaning.
- Complete control panel consisting of emergency stop and electronic board.
- Variable speed drive.
- Built according to CE regulations.
- Temperature range from 50°C to 180°C.
- Safety valve for overpressure.
- Recipe book in PLC with programmable touchscreen.
- Possibility of obtaining a process data log for sanitary control (Industry 4.0).
- Filling and cleaning tap (optional).
- Drainage tap (optional).

MODEL: SBE500A

DIMENSIONS: LENGT 2145mm. / WIDTH 1580mm. / HEIGHT 1550 mm.

RESISTANCE POWER: 36 KW.


MOTOR POWER: 1,1 Kw.

TOTAL POWER: 37,1 Kw


CAPACITY 500 L.

VOLTAJE: 380/400V III.


DIMENSIONES

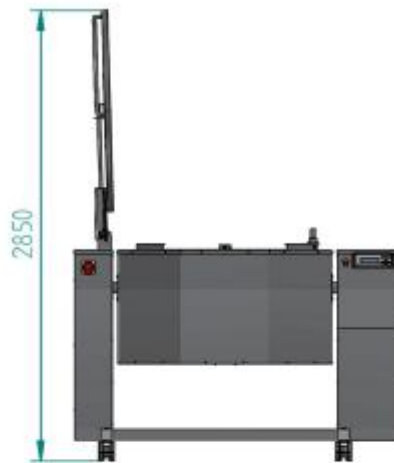

VISTA FRONTAL



VISTA LATERAL



VISTA PLANTA



VISTA ISOMÉTRICA

PESO APROX. 590 Kg.
CONEXIÓN ELÉCTRICA: 280/400

The company reserves the right to make technical modifications without prior notice.

www.inhospans.com

V1.0 – 2022/06/06