

DATA SHEET

HOT CREAM COOKER AMC80

Designed for the preparation of doughs and sauces that require fast and uniform cooking, while also capable of operating at room temperature. Ideal for rotisseries, restaurants, hotels, meat-processing facilities, ready-meal manufacturers, and other large-scale catering operations. Its versatility makes it suitable for preparing a wide range of products — from croquettes, béchamel, and general sauces to pastry cream, melting chocolate, jams, syrups, nuts, and cheese creams.



TECHNICAL SPECIFICATIONS:

- Constructed from satin-finished AISI 304 stainless steel.
- Double-walled stainless steel kettle.
- Heating system with stainless steel armored electric resistances, immersed in thermal oil.
- Three operating modes: continuous rotation in the same direction, rotation with pause, reverse rotation, and automatic bowl positioning for emptying.
- Mixing paddle with removable Teflon scrapers for easy cleaning.
- Complete control panel featuring emergency stop and TFT electronic control board.
- Variable speed drive.
- Manufactured in compliance with CE standards.
- Temperature range: 50°C to 160°C.
- Tilting kettle: 100°.
- Water resistance rating: IP6.
- Overpressure safety valve.
- Drain tap (optional).
- Adjustable speed, up to 90 rpm.

MODEL: **AMC80**

DIMENSIONS: LENGT 1058 mm. / WIDTH 740 mm. / HIGH 1538 mm.


POWER RESISTANCE: 9 KW.

MOTOR POWER: 1,5 KW.


CAPACITY: 80 L.

VOLTAJE: 380V III.

DIMENSIONS

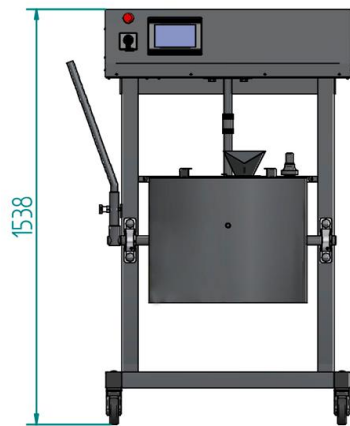


VISTA ISOMÉTRICA

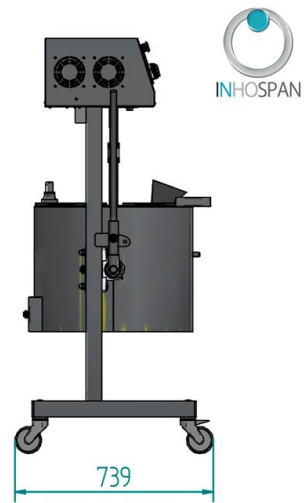

VISTA LATERAL



VISTA ISOMÉTRICA



VISTA PLANTA

APROXIMATE WEIGHT: 200Kg.
ELECTRICAL CONECTION: 380V

The company reserves the right to make technical modifications without prior notice.

www.inhospan.com